





AHUJA offers a 100V line wall mounting box speaker to meet the requirements of indoor public address and background music. The unit consists of a highly efficient 5" full range speaker housed in an attractive high impact ABS cabinet to match any decor. Power tap / impedance selection arrangement is simple and does not require soldering or any other tool, it can be done by fixing the female receptacle (or push-fit terminal) on the black wire to the required tap as shown in the diagram. The speaker is enclosed in a cloth bag for protection.

### Features

- Clear & clean sound for speech and music.
- Elegant plastic cabinet in white colour.
- Power tap selection on 100V through female receptacle (push-fit).
- Key hole for easy wall mounting.
- Holes provided on the cabinet for mounting with screws to make it vandal proof.
- Ideal for use in Schools, Offices, BPOs, Hospitals, Banks, Restaurants & Showrooms.

### Specifications

<b>Input Power</b>	5W RMS / 7.5W Max.
<b>Power Taps on 100V</b>	5 / 2.5 / 1.25W
<b>Speaker</b>	1 × 5" Full Range
<b>Impedance</b>	2k / 4k / 8kΩ
<b>Frequency Response</b>	80-15,000 Hz
<b>SPL at 1kHz (1W/1m)</b>	92dB
<b>Finish</b>	ABS White Colour
<b>Dimensions</b>	W179 × H195 x D101 mm
<b>Net Weight</b>	0.80kg

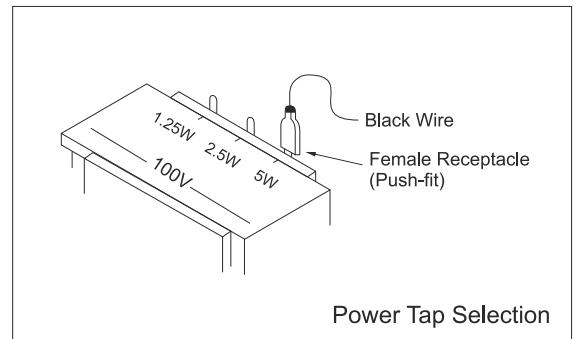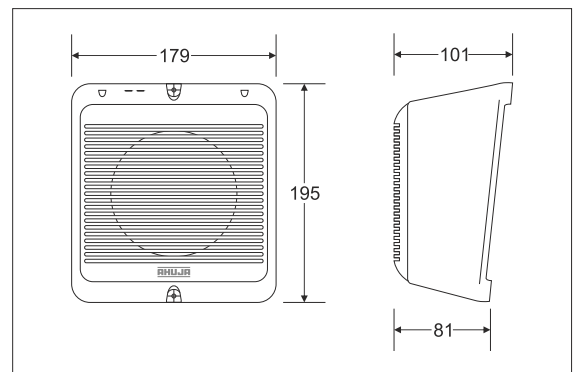

Design and Specifications are subject to change without notice owing to continuous product up-gradation. Technical specifications are subject to production tolerances. We cannot be held responsible for printing errors, should they occur. AHUJA is a registered trademark of Ahuja Radios in India and other countries. © Copyright Ahuja Radios, 2013. All rights reserved. Any unauthorized reproduction or use of logos, images or design elements is strictly prohibited by law. No part of this compilation may be reproduced in any manner or translated without written permission.